

NOTICE TO MARINERS



DOGGER BANK OFFSHORE WIND FARM

DATE OF ISSUE:	20/07/2026
NOTICE TO MARINER NUMBER	LF700013-IAC-DOG-NOT-0008 Rev 002

Dogger Bank C IAC Burial Operations

LOCATION DESCRIPTION		Dogger Bank C Offshore Windfarm
COORDINATES WGS 84	DBC OWF	See Table 1 below
START DATE/TIME		22/07/2026
END DATE/TIME		10/08/2026

Description of Hazard/Operation

The Trenching Support Vessel (TSV), **Grand Canyon II**, will perform the inter array cable burial works in the Dogger Bank C OWF Inter Array Cable Area.

This campaign will commence around 22nd of July 2026 and continue until approximately the 10th of August 2026. The works will be continuous, 24 hours a day. Charts of the DBC array area are provided below.

The Trenching Support Vessel will deploy the cable trenching vehicle (trencher) over the surface laid inter array cables installed by VIKING NEPTUN. Additionally, the vessel will deploy its ROV in the water for further monitoring/survey works.

During operations, the **Grand Canyon II** will be restricted in its ability to manoeuvre as defined under COLREGs (International Regulations for Preventing Collisions at Sea 1972) and will display the appropriate day shapes and lights. The vessel will also transmit an Automatic Identification System (AIS) message.

It is requested that all vessels maintain a minimum of 1.5Nm separation distance from the vessel and pass at reduced speed. Fishing gear or other equipment with seabed intervention should not be deployed when approaching the working corridor.

Contact Details

Marine Coordination Contact	Duty Marine Coordinator Tel: +44 (0) 7586 332078 gm_dbmcc@equinor.com
Fisheries Liaison Officer (FLO) CONTACT	Alex Winrow-Giffin, Brown & May Marine Ltd Alex@brownmay.com Tel: 01379 870181 Mob: 07760 160039 Zoë Lawrence - Brown & May Marine Ltd zoe@brownmay.com Mob: 07923 138175
Vessel Shore Contact	Brutus Ophalvens (DEME HSE Manager) Mobile: +32 489 39 89 90 Email: Ophalvens.Brutus@deme-group.com

NOTICE TO MARINERS

DOGGER BANK WIND FARM

Supporting Information

Vessel – North Sea Enabler	Contact Details	
	Call Sign	LACY8
	MMSI / IMO	257038580 / 9653874
	Vessel Details	
	Length / Beam	125.5M X 25M
	Draft	6.2M
Vessel Contact		V-sat Bridge: +47 23 41 29 11 V-sat Master: +47 23 41 29 12 Email master/bridge: master@grand-canyon2.no bridge@grand-canyon2.no

Table1: Coordinates for DBC Construction area

COORDINATES WGS 84	DBC IAC array area	Latitude	Longitude
		55°08.119'N	002°32.765'E
		55°08.152'N	002°45.781'E
		54°58.196'N	003°00.170'E
		54°56.238'N	003°00.169'E
		54°56.191'N	002°32.921'E

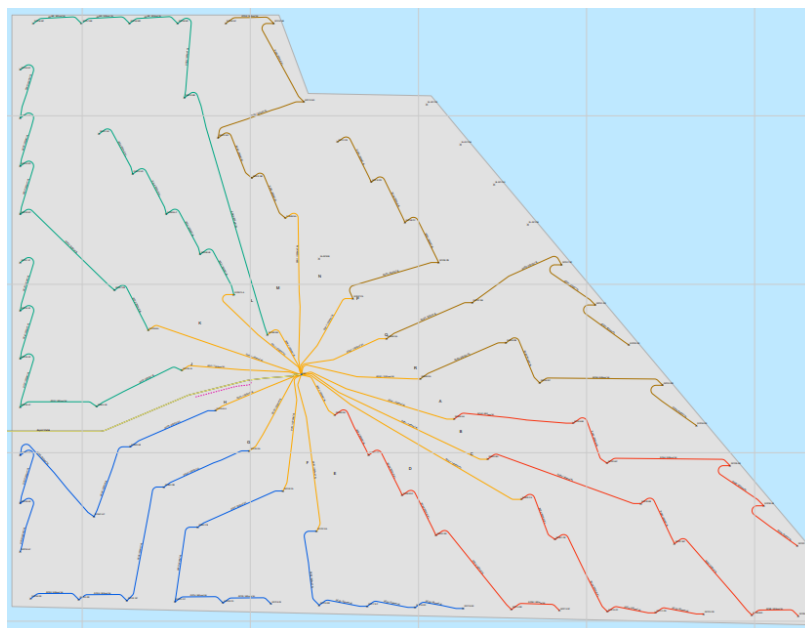


Fig 1 Dogger Bank C OWF IA Cable Layout