NOTICE TO MARINERS

DOGGER BANK WIND FARM

DOGGER BANK OFFSHORE WIND FARM

DATE OF ISSUE:	LF600013-IAC-DOG-NOT-0005
NOTICE TO MARINER NUMBER	16/12/2024

Dogger Bank B IAC Post Lay Burial

LOCATION DESCRIPTION		**Dogger Bank B Offshore Windfarm**
COORDINATES WGS 84	**DBA OWF**	**See Table 1 below**
START DATE/TIME		**30/12/2024**
END DATE/TIME		**01/02/2025**

Description of Hazard/Operation

The Cable Lay Vessel (CLV) **LIVING STONE** will perform the inter array cable post lay burial works with the commencement around end of December 2024 / beginning of January 2025. The works will continue until end of January 2025. The works will be continuous, 24 hours a day. Charts of the DBB array area are provided below.

The cable lay vessel will deploy the cable trenching vehicle (trencher) over the surface laid inter array cable installed by VIKING NEPTUN. Additionally, the vessel will have its ROV in the water for further monitoring/survey works.

During operations, the **LIVING STONE** will be restricted in their ability to manoeuvre as defined under COLREGs (International Regulations for Preventing Collisions at Sea 1972) and will display the appropriate day shapes and lights. The vessel will also transmit an Automatic Identification System (AIS) message.

It is requested that all vessels maintain a minimum of 1.5Nm separation distance from the vessels and pass at reduced speed. Fishing gear or other equipment with seabed intervention should not be deployed when approaching the working corridor.

Contact Details

Marine Coordination Contact	**Duty Marine Coordinator Tel:** **+44 (0) 7586 332078** **gm_dbmcc@equinor.com**
Fisheries Liaison Officer (FLO) CONTACT	**Alex Winrow-Giffin, Brown & May Marine Ltd** **Alex@brownmay.com** **Tel: 01379 870181 Mob: 07760 160039 Zoë Lawrence - Brown & May Marine Ltd** **zoe@brownmay.com Mob: 07923 138175**
Vessel Shore Contact	**Bart van Dun (DEME HSE Engineer)** **Mobile: +31 6 38 68 59 48 Email: Van.Dun.Bart@deme-group.com**

NOTICE TO MARINERS

DOGGER BANK WIND FARM

Supporting Information

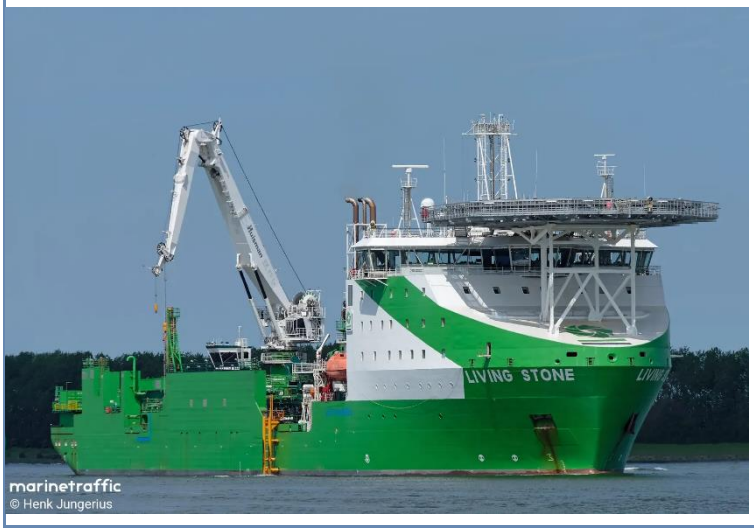
Vessel – LIVING STONE	Contact Details	
	Call Sign	PBXN
	MMSI / IMO	244010952 / 9776925
	Vessel Details	
	Length / Beam	161M / 32M
	Draft	Operating 7.5M
	Vessel Contact	V-sat: +49 421 5172191984 Email bridge: Bridge.Livingstone@deme-group.com

Table1: *Coordinates for DBB Construction area*

		Latitude	Longitude
COORDINATES WGS 84	**DBB IAC array area**	54° 52.257'N	01°28.433'E
		54° 58.080'N	01°29.326'E
		54° 58.319'N	01°29.301'E
		55° 04.470'N	01°30.329'E
		55° 04.687'N	01°33.472'E
		55° 06.018'N	01°40.388'E
		55° 06.129'N	01°51.298'E
		54° 51.554'N	01°51.712'E
		54° 52.257'N	01°28.433'E

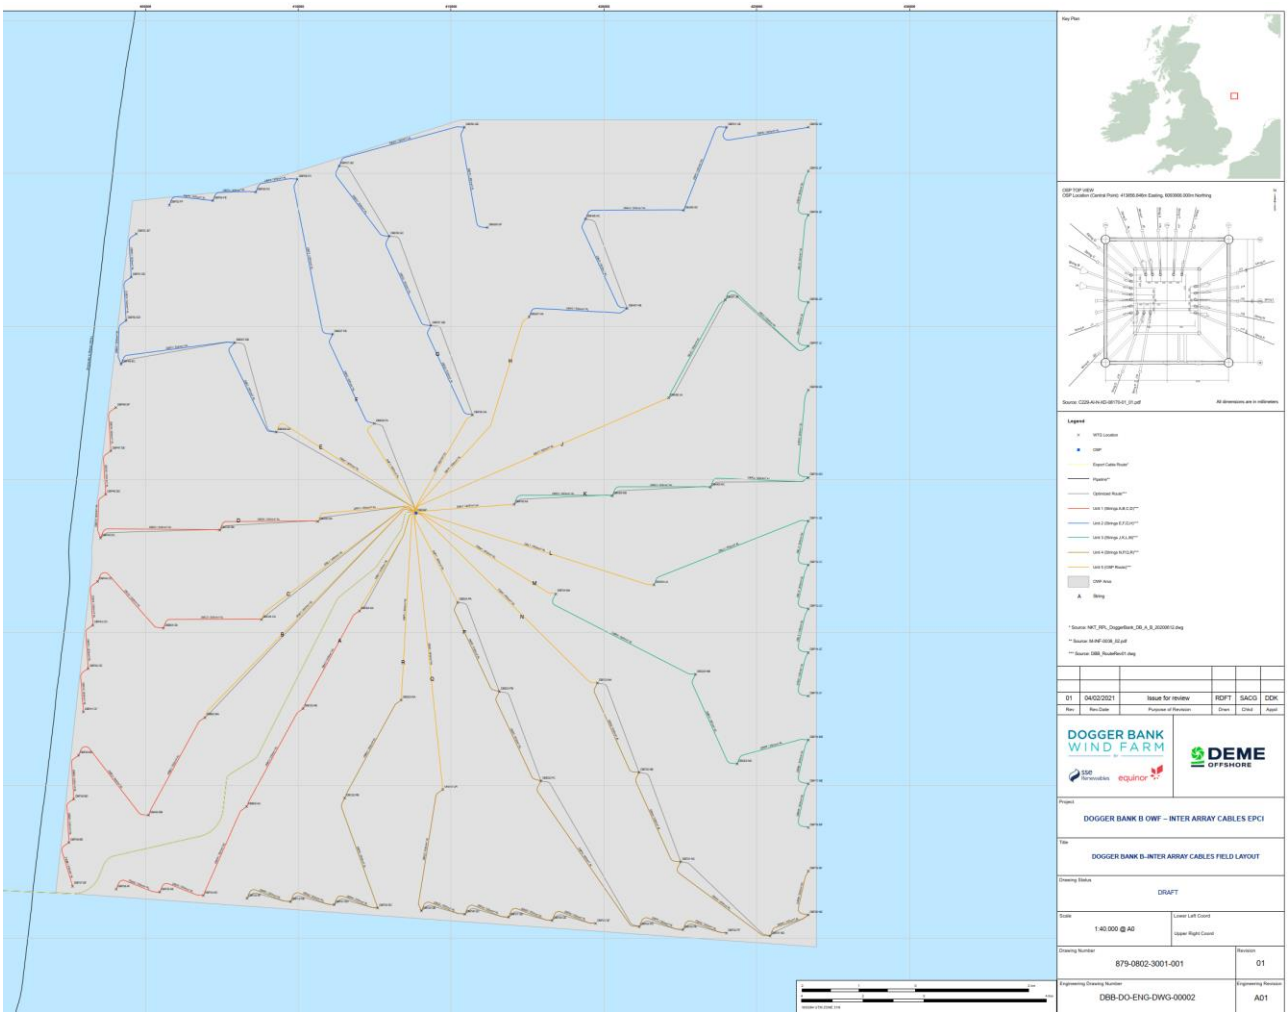


Figure 1: Fig 1 Dogger Bank B OWF IA Cable Layout